



# smartARS pro-PV

NH fuse switch disconnectors



smartARS 00  
pro-PV



smartARS 2  
pro-PV



smartARS 3  
pro-PV

## New smartARS pro-PV AC 800 V

### A safe step into the future with Apator

The new switch fuse disconnecter smartARS in the AC800V product line is a device which has been developed to meet the needs and requirements of the future.

Solar power systems and a new generation of inverters are assembled on AC800V correctly and safely under load. In the future AC800V will be extended by the smartARS family; moreover, it can be modified to facilitate the digitization of the energy transition.

High-quality materials and years of experience of APATOR Group in the NH disconnectors sector ensure excellent cost-benefit ratio.

Table 1. Technical data









Parameter			smartARS 00 pro-PV	smartARS 2 pro-PV	smartARS 3 pro-PV
For NH fuse-links acc. to DIN VDE 0636-2	Size		00	1,2	3
Rated operational voltage	$U_e$	V	AC800	AC800	AC800
Rated operational current	$I_e$	A	80	200	400
Conv. free air thermal current with fuse-links	$I_{th}$	A	80	200	400
Rated frequency	f	Hz	50 - 60	50 - 60	50 - 60
Rated insulation voltage	$U_i$	V	AC1000	AC1000	AC1000
Rated impulse withstand voltage	$U_{imp}$	kA	8	12	12
Utilization category			AC21B 80A/ 800V	AC21B 200A/800V	AC21B 400A/ 800V
Fuse protected short circuit withstand		kA	100 <sup>1)</sup>	120 <sup>1)</sup>	120 <sup>1)</sup>
Fuse protected short circuit making		kA	100 <sup>1)</sup>	120 <sup>1)</sup>	120 <sup>1)</sup>
Max. permis. power loss per fuse-link	$P_a$	W	11	21	41
Pollution degree			3	3	3
IP degree of protection	IP		30		
Ambient temperature	°C		-25 °C to + 55 °C		
Attitude	m		up to 2000 meters above sea level		
Busbar system	mm		for installation on 185 mm busbar system		
Actuation	-		manual		
Rated operation mode	-		continuous operation		

<sup>1)</sup> with WTNH gG fuse links (500 V)

**Table 2. Versions**

Version		Weight	Article No.
<b>for installation on to 185 mm busbar system, three pole switching - all phases simultaneously</b>			
smartARS 00-3 pro-PV	cable terminals: bridge terminals with bridge clamps (5) 4-70mm <sup>2</sup> , screw terminals with M8 screws	2,5 kg	63-073821-001
smartARS 00-3-V pro-PV	cable terminals: V-terminals with V-clamps 25-150 SW	2,6 kg	63-073821-002
smartARS 2-6-V pro-PV	cable terminals: V-terminals with V-clamps 240 mm <sup>2</sup>	5,8 kg	63-073822-001
smartARS 3-6-V pro-PV	cable terminals: V-terminals with V-clamps 240 mm <sup>2</sup>	6,6 kg	63-073822-002
smartARS 2-6-M pro-PV	cable terminals: screw terminals with pressed nuts M12	5,7 kg	63-073822-003
smartARS 3-6-M pro-PV	cable terminals: screw terminals with pressed nuts M12	6,5 kg	63-073822-004
smartARS 2-6-2V pro-PV	cable terminals: 2V-terminals with double V-clamps 240 mm <sup>2</sup>	6,4 kg	63-073822-005
smartARS 3-6-2V pro-PV	cable terminals: 2V-terminals with double V-clamps 240 mm <sup>2</sup>	7,2 kg	63-073822-006

**Table 3. smartARS 00 pro-PV terminal clamps**

Description	smartARS 00 pro-PV			
Clamp	S-bridge clamp 2 x M5 x 25	M8 screw*	V-clamp 25-150 SW	HM 10-120
Picture of clamp				
Drawing of clamp				
Cross –section of conductors	4 - 70 mm <sup>2</sup>	Lug terminal max 185 mm <sup>2</sup>	re ● 16 mm <sup>2</sup> - 95 mm <sup>2</sup>	re ● 10 mm <sup>2</sup> - 70 mm <sup>2</sup>
			se ◆ 25 mm <sup>2</sup> - 150 mm <sup>2</sup>	se ◆ 25 mm <sup>2</sup> - 120 mm <sup>2</sup>
			rm ⊗ 16 mm <sup>2</sup> - 95 mm <sup>2</sup>	rm ⊗ 10 mm <sup>2</sup> - 70 mm <sup>2</sup>
			sm ⊕ 25 mm <sup>2</sup> - 150 mm <sup>2</sup>	sm ⊕ 25 mm <sup>2</sup> - 95 mm <sup>2</sup>
Tightening torque	3 Nm**	12 Nm**	20 Nm**	15 Nm**

For stranded conductors using cable ferrules is recommended





\*) bars of maximum width of 20 mm and maximum thickness of 5 mm can be fixed to M type screw terminals

\*\*\*) using tension wrench is recommended

\*\*\*\*) fuse switch disconnectors with V-terminals are equipped with steel V-clamp HM 10-120 on request

Aparator takes responsibility for technical quality of V-terminals manufactured only by the company. Minimum tightening torque (M8 screw) for screws fixing fuse switch disconnector to busbar system – 12 Nm, recommended tightening torque for screws and nuts with property class 8.8 – 21 Nm.

**Table 4. smartARS 2,3 pro-PV terminal clamps**

Description	smartARS 2,3-x-V pro-PV		smartARS 2,3-x-2V pro-PV		smartARS 2,3-x-2V pro-PV		smartARS 2,3-x-M pro-PV
Clamp	V-clamp 35-300SW-B		V-clamp 2/50-300SW-B		V-clamp HS 2/50-240-C*		M-screw M12**
Picture of clamp							
Cross – section of conductors	V-clamp for direct fixing of conductor with bare end with crosssection of						Lug terminal
	35 - 185 mm <sup>2</sup> ⊗	35 - 240 mm <sup>2</sup> ●	50 - 185 mm <sup>2</sup> ⊗	50 - 240 mm <sup>2</sup> ●	50 - 185 mm <sup>2</sup> ⊗	50 - 240 mm <sup>2</sup> ●	
	35 - 240 mm <sup>2</sup> ⊕	35 - 300 mm <sup>2</sup> ◆	50 - 240 mm <sup>2</sup> ⊕	50 - 300 mm <sup>2</sup> ◆	50 - 240 mm <sup>2</sup> ⊕	50 - 300 mm <sup>2</sup> ◆	
Tightening torque	30 Nm		30 Nm		40 Nm		56 Nm

For stranded conductors using cable ferrules is recommended


\*) if the fuse switch disconnector with a 2V-type clamp is to be equipped with a steel V-clamp HS 2/50-240-C, it should be included in the order

\*\*\*) bars of maximum width of 40 mm and maximum thickness of 8 mm can be fixed to M type screw terminals when protective barrier between phases is installed


Aparator takes responsibility for technical quality of V-terminals manufactured only by the company. Minimum tightening torque (M12 screw) for screws fixing fuse switch disconnector to busbar system – 32 Nm, recommended tightening torque for screws and nuts with property class 8.8 – 56 Nm.

## DIMENSIONS

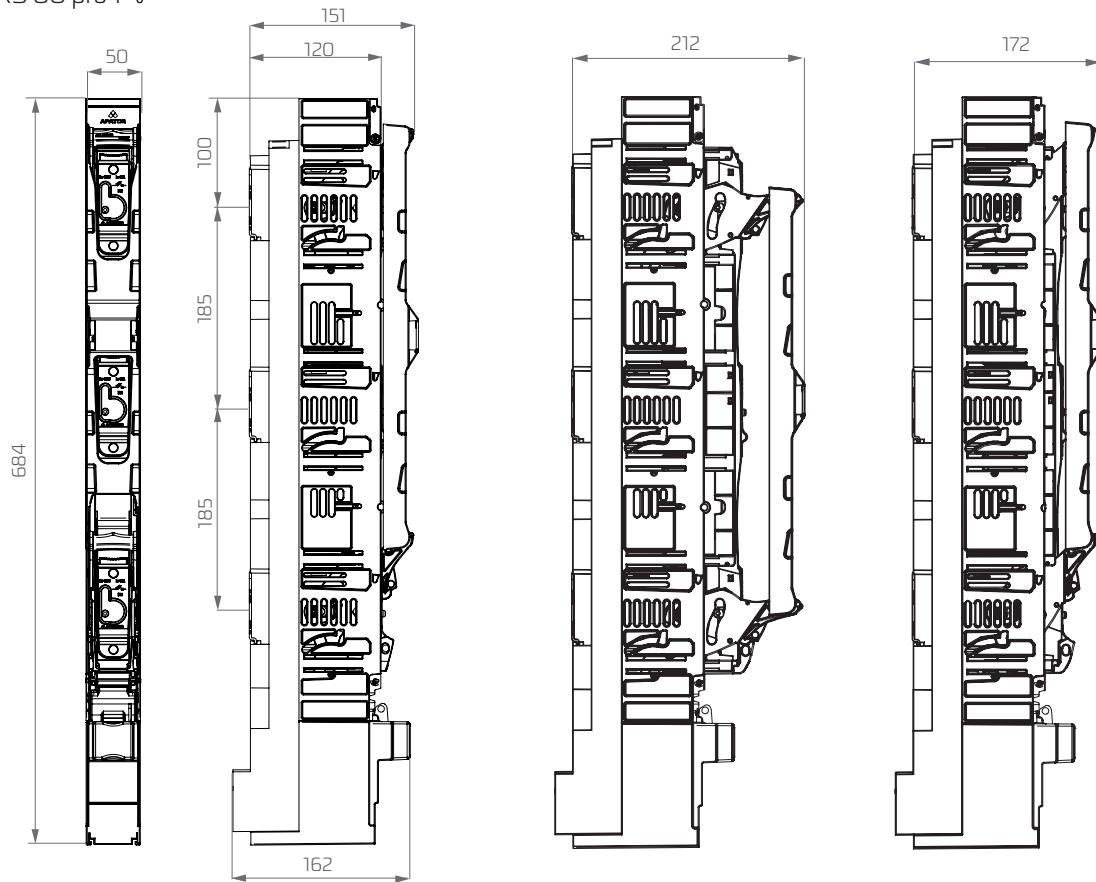
smartARS 00 pro-PV



smartARS 2,3 -M,-V pro-PV

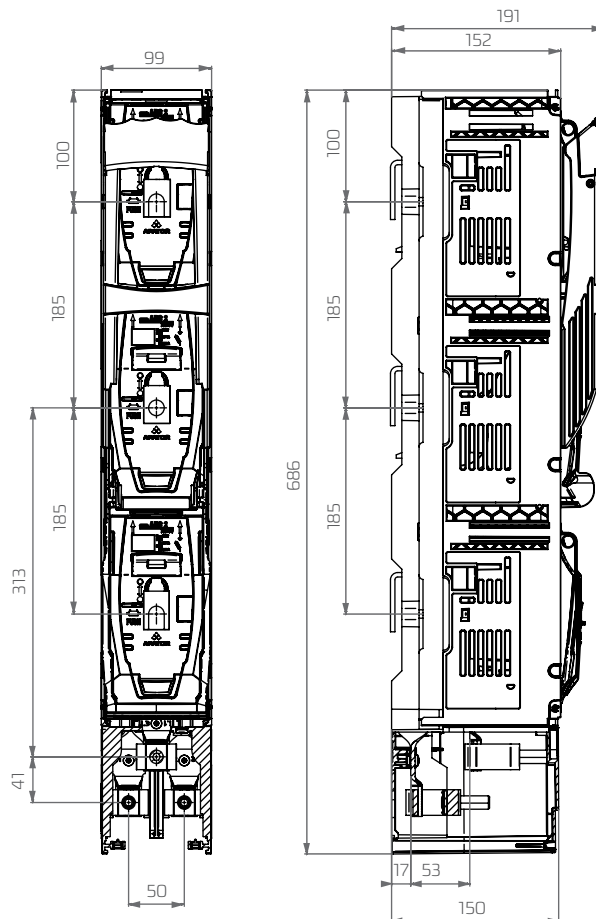

smartARS 2,3 -2V pro-PV

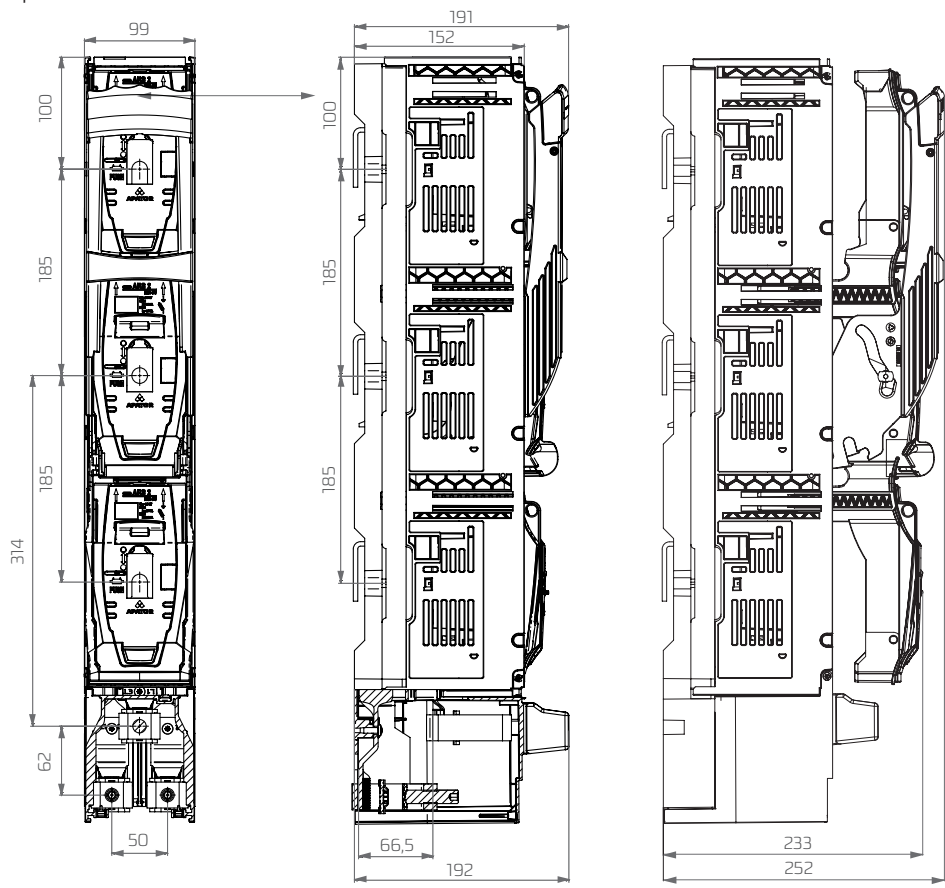

the publication is only for information purposes  
and it is not the offer in understanding of the law

#### DIRECTOR OF SWITCHGEAR DIVISION

Rober Łuczak (English, Russian)	robert.luczak@apator.com	+48 506 009 964
---------------------------------	--------------------------	-----------------

#### KEY ACCOUNT MANAGER

Rafał Kamiński (English, Russian) Central Europe, South East Europe	rafal.kaminski@apator.com	+48 506 009 338
--	---------------------------	-----------------

Michael Roclawski (German, English) Germany, Austria, Switzerland	michael.roclawski@apator.com	+48 506 009 339
--	------------------------------	-----------------

Krzysztof Zdrojewski (English) Middle East, South America, Asia, Africa	krzysztof.zdrojewski@apator.com	+48 506 009 309
--	---------------------------------	-----------------

Jevgenijus Samuchovas (Lithuanian, Russian) Eastern Europe, Baltic Countries	jevgenijus.samuchovas@apator.com	+370 62 842709
--	----------------------------------	----------------

Josef Kalleder (Romanian, English) Romania, Rep. of Moldova	josef.kalleder@apator.com	+40 74 5267192
--	---------------------------	----------------

#### TECHNICAL SUPPORT

##### Business Development Manager

Łukasz Melkowski (English)	lukasz.melkowski@apator.com	+48 506 009 334
----------------------------	-----------------------------	-----------------

##### Product Marketing Manager

Jakub Szczepkowski (English)	jakub.szczepkowski@apator.com	+48 506 009 395
------------------------------	-------------------------------	-----------------



#### APATOR SA

ul. Gdańska 4a, lok C4, 87-100 Toruń, Poland  
lok. PL-87-100

Correspondence address:  
Apator S.A. Centrum  
Ostaszewo 57C, 87-148 Łysomice, Poland

e-mail [trade@apator.com](mailto:trade@apator.com)  
head office tel. +48 56 61 91 494, +48 56 61 91 316, fax +48 56 61 91 295