





# Screw clamps v-klema type HM steel double



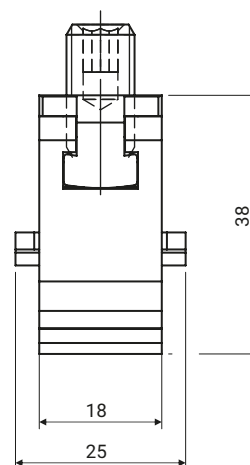

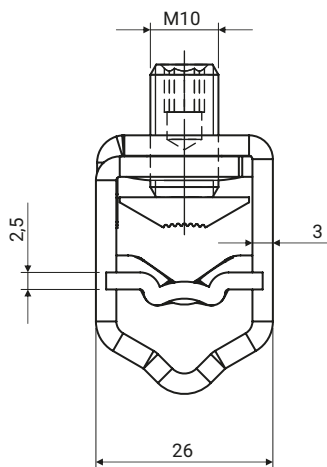

HM 2/10-70-A

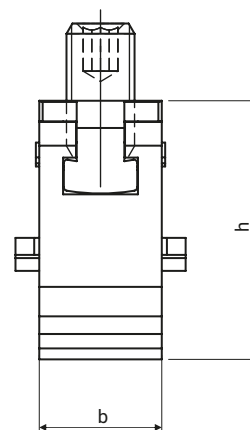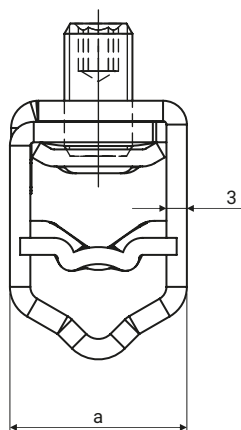

HM 2/10-70-B



-  **sm** - multiwire sector shaped conductor (flexible)       **rm** - round multiwire conductor (flexible)
-  **se** - sector shaped conductor (rigid)       **re** - round conductor (rigid)

| DETAIL       | CROSS-SECTION [mm <sup>2</sup> ] |       |       |       | MAX TIGHTENING TORQUE [Nm] | DIMENSIONS |    |    |
|--------------|----------------------------------|-------|-------|-------|----------------------------|------------|----|----|
|              | sm                               | se    | rm    | re    |                            | a          | b  | h  |
| HM 2/10-70-A | 10-50                            | 10-70 | 10-35 | 10-50 | 15                         | 26         | 18 | 38 |
| HM 2/10-70-B | 10-50                            | 10-70 | 10-35 | 10-50 | 15                         | 26         | 18 | 38 |

|                          | HM 2/10-70-A      | HM 2/10-70-B      |
|--------------------------|-------------------|-------------------|
| <b>Clamp</b>             | Brass tin-plated  | Steel zinc-plated |
| <b>Housing</b>           | Steel zinc-plated | Steel zinc-plated |
| <b>Screw</b>             | Steel zinc-plated | Steel zinc-plated |
| <b>Compression plate</b> | Copper tinned     | Copper tinned     |

\* Screw clamps conform to EN 60947-7-1 (IEC 60947-7-1)